

Infinity® C700 for IT Workstation


Today, a patient-vicinity IT workstation is a necessity for bringing integrated clinical information to the point of care. The Infinity® C700 for IT is a state-of-the-art medical device that displays patient vital sign data, clinical software applications, and networked information at the point of care.



The Infinity C700 for IT combines a CPU with a 20" touchscreen color display designed for use at the patient vicinity. The widescreen format offers a large viewing angle for increased visibility, while the Surface Acoustic Wave (SAW) touchscreen technology provides high image clarity with a sturdy all-glass panel that is ideal for hygienic environments.

The 20" widescreen format makes it easy to display information in a split screen presentation, while the fan-less design reduces dust and noise level.

The Infinity C700 for IT supports clinical decision-making as either a patient-vicinity PC or as the widescreen component of the Infinity Omega solution.

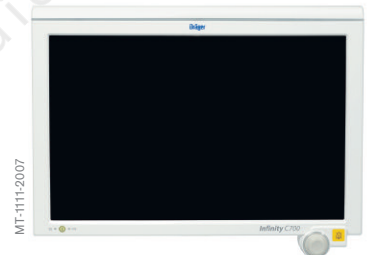

Infinity C700 for IT workstation
Combines CPU with 20" touchscreen display, space-saving profile, and quiet fan-less design.

TECHNICAL SPECIFICATIONS

PRODUCT SPECIFICATIONS

H x W x D	337 mm x 486 mm x 127.5 mm (13.27 x 19.13 x 5.02)
Weight	11.2 kg (24.7 lbs)
Cooling	Convection
Touchscreen	Surface Acoustic Wave (SAW)
CPU	INTEL Pentium M 1.4 GHz with 2 MB L2 Cache
Memory	1 GB (DDR2 533 SODIMM)
Power MTBF	Minimum 100,000 hours
Operating system	Microsoft Windows® XP Pro
Computer memory and realtime	3 V lithium coin cell (part number MS22812)

CONTINUING TECHNICAL SPECIFICATIONS

clock backup battery	Connectors
3 external RS232 (9-pin) connectors (not used)	
4 USB ports (on the back panel)	
2 USB ports (on the side panel)	
1 DVI for independently configurable display with touch screen control (not enabled with Infinity Explorer)	2 DVI for independently configurable display output supporting up to 1920 x 1200 resolution (not enabled with Infinity Explorer)
	2 RJ45 Ethernet connectors to connect to safety extra-low voltage (SELV) networks
Input voltage	18V to 30V DC, 5.5 A/3.3 A max
Rotary knob (optional)	Navigation tool

DISPLAY SPECIFICATIONS

Resolution (max)	1680 x 1050
Colors	262,000
Contrast ratio	500:1
LCD MTBF	50,000 hours
Viewing angle	170 degrees
Display type	51 cm (20.1 inch) TFT wide screen LCD
Dot size (mm)	0.258 mm

Environmental Requirements

Temperature

Operating	0° C to 40° C (32° F to 104° F)
Storage	-20° C to 60° C (-4° F to 140° F)

Relative humidity

Operating	10% to 95% (non-condensing)
Storage	5% to 95% (non-condensing)

Atmospheric pressure

Operating	70 to 106 kPa
Storage	50 to 106 kPa

Altitude	0 to 3048 m (0 to 10,000 feet)
----------	--------------------------------

Standards

	FCC, Class B
	IEC 60601-1: (EN60601-1)
	CAN/CSA 22.2 No 601.1 M90 (with release to Canada)
	UL 60601-1 (with release to U.S.)
	IEC 60601-1-1: 2000 Medical Electrical System
	IEC 60601-1-2:2001, EMC overall standard
Liquid ingress protection	IPX1 (drip-proof) per IEC 60529
Packaged Shock and Vibration	Per ISTA procedure 1
Operational shock	30 G, half-sine, 11 ms, 600 total shocks, per IEC 60068-2-27
Operational vibration	IEC 60068-2-6 (0.047 double amplitude displacement (5-32 Hz) 2G (32-500 Hz)
Random vibration	1.04 g rms, broadband, 10 to 500 Hz, 6 hours, per IEC 60068-2-64

POWER SUPPLY (120 WATTS) SPECIFICATIONS

CAUTION: Always use a power cord with a hospital-grade plug.

Physical Attributes

Connections	System cable
Cooling	Convection – non vented case
Size (W x D x H)	74 mm x 51 mm x 229 mm (10.93 x 2.0 x 2.9)
Weight	684 grams, 24 ounces (excluding cord)
Power requirements	Voltage – 100 to 240 VAC (50 to 60 Hz, 2.0 A) MBTF – Minimum 100,000 hours
DC output	+24V/5 A
Protection class	Class I
Mode of operation	Continuous
Liquid ingress protection	IPX 0 per IEC 60529

Environmental Requirements**Temperature range**

Operating	0° C to 40° C (32° F to 104° F)
Storage	-30° C to 85° C (-22° F to 185° F)

Relative humidity

Operating	10% to 95% (non-condensing)
Storage	5% to 95% (non-condensing)

Atmospheric pressure

Operating	70 to 106 kPa
Storage	50 to 106 kPa
Altitude	0 to 3048 m (0 to 10,000 feet)

Standards

Complies with IEC 60601-1 and IEC 60601-1-2 with applicable regional/national deviations

ORDERING INFORMATION

Infinity C700 for IT Workstation	MS22249
120 watt power supply for use with the Infinity C700 for IT	MS20749
Rotary knob (optional)	MS22771

For a list of available languages, contact your Dräger sales representative.



HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany

www.draeger.com

**REGION EUROPE CENTRAL
AND EUROPE NORTH**

Dräger Medical GmbH
Moislinger Allee 53–55
23558 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION EUROPE SOUTH

Dräger Médical S.A.S.
Parc de Haute
Technologie d'Antony 2
25, rue Georges Besse
92182 Antony Cedex, France
Tel +33 1 46 11 56 00
Fax +33 1 40 96 97 20
dlmfr-contact@draeger.com

**REGION MIDDLE EAST, AFRICA,
CENTRAL AND SOUTH AMERICA**

Dräger Medical GmbH
Branch Office Dubai
Dubai Healthcare City, P.O. Box 505108
Dubai, United Arab Emirates
Tel + 971 436 24 762
Fax + 971 436 24 761
contactuae@draeger.com

REGION ASIA / PACIFIC

Dräger Medical
South East Asia Pte Ltd
25 International Business Park
#04-27/29 German Centre
Singapore 609916, Singapore
Tel +65 6572 4388
Fax +65 6572 4399
asia.pacific@draeger.com

REGION NORTH AMERICA

Dräger Medical, Inc.
3135 Quarry Road
Telford, PA 18969-1042, USA
Tel +1 215 721 5400
Toll-free +1 800 437 2437
Fax +1 215 723 5935
info.usa@draeger.com

Manufacturer:

Dräger Medical Systems, Inc.
Telford, PA 18969, USA
The quality management system at
Dräger Medical Systems, Inc. is
certified according to ISO 13485,
ISO 9001 and Annex II.3 of Directive
93/42/EEC (Medical devices).